


ME by Starck One-piece toilet Duravit Rimless® for SensoWash® f # 2190012005

|< 360 mm >|



One-piece toilet Duravit Rimless® for SensoWash® f	Dimension	Weight	Order number
rimless, US-version, elongated with syphonic jet action, 305 mm/12" rough-in, only in combination with SensoWash f, vertical outlet			
Colors			
20 HygieneGlaze (an antibacterial ceramic glaze that provide almost indefinite effectiveness)	S		
Variant			
1,32/0,92 gpf (5/3,5 lpf), with Dual Flush mechanism	360 x 750 mm	67.000 kilogram	2190012005
Infobox			
Not available in WonderGliss			
Accessory			
Mounting set for One-piece and Two-piece toilets, Outflow $3/$ - external thread, Wall Connection $1/2"$ - internal thread, $1/2$ US-version		0.480 kilogram	001417
Mounting set for One-piece and Two-piece toilets, 1/2", ASIA-version	-	0.480 kilogram	001416
Suitable products			
SensoWash® Starck f Plus shower toilet seat Rear-, Lady- ar Comfortwash, Seat heating, Warm air dryer, individual adjustment of water-, air- and seat temperature as well as spray wand position and water spray intensity, Night light, Intelligent energy saving mode, Remote control included, App operation, Self-cleaning spray wand, Descaling function, Automatic drainage in periods of prologed disuse, 378 x 574 mm	270 v 57/ mm		612000

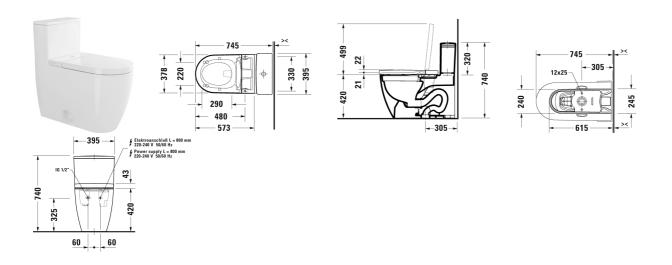

ME by Starck One-piece toilet Duravit Rimless® for SensoWash® f # 2190012005

|< 360 mm >|

SensoWash® Starck f Lite shower toilet seat Rear-, Lady- and Comfortwash, Seat heating, Intelligent energy saving mode, Warm air dryer, individual adjustment of water-, air- and seat temperature as well as spray wand position and water spray intensity, Automatic drainage in periods of prologed disuse, Descaling function, Night light, Remote control included, App operation, Self-cleaning spray wand, Seat/lid material thermoplastic, 378 x 574 mm	378 x 574 mm	612001

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.