


Specify Finish Required ☐ Stainless Steel, Satin Finish
☐ Matte Black Finish, please use model no. B-9890.MBLK

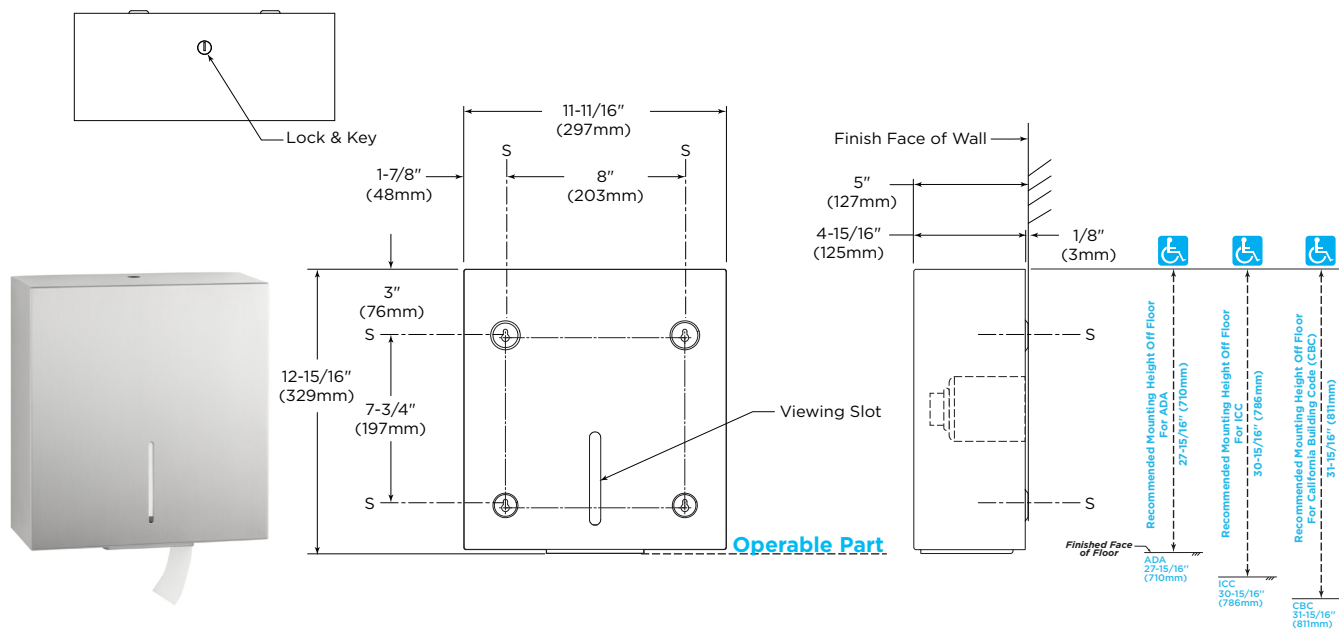

ADA/CBC Installation Guidance

***Operable Part:** Toilet tissue dispenser opening on the bottom of the cabinet.

Minimum mounting height of Operable Part:

ADA: 15" (381mm) above finished floor (AFF)

ICC: 18" (457mm) above finished floor (AFF)

CBC: 19" (483mm) above finished floor (AFF)

*For more information regarding operable parts, please refer to Bobrick Planning Guide for Accessible Restrooms, page 9.

MATERIALS:

Cabinet — Unit is of type 304, 18-gauge (1,2mm) stainless steel satin finish or matte black as specified. All seam-welded construction with well defined edges and corners. Cabinet is connected to backplate via a hinge at the unit's rear bottom. Cabinet-swing-limiter allows cabinet to open down to a horizontal position, which eases refill of toilet roll and prevents cabinet from harming the wall when opening. Slot reveals toilet tissue supply inside cabinet. Equipped with a tumbler lock keyed like other Bobrick Washroom Equipment accessories. Lock is on top of unit flush with the surface - no protrusion.

Spindle — Fixed inner spindle, 18-gauge (1,2mm), stainless steel, seam welded against backplate. Adapters for different toilet roll core diameters are furnished: white plastic adapter - part number 2890-10 and (2) o-rings - part number 2890-15.

Backplate — 18-8, type-304, 20-gauge (0.91mm) stainless steel.

continued . . .

OPERATION:

Door unlocks with key provided and swings down to load dispenser. Unit accommodates one toilet tissue roll up to 10" (255 mm) diameter with a 1-5/8" (40 mm) diameter core roll.

Spindle adapters (furnished by manufacturer) accommodate different core diameters. Two rubber o-rings (part number 2890-15/ea) may be added to the steel inner spindle to accommodate a 2-1/8" (55mm) diameter core roll. White plastic spindle adapter (part number 2890-10) can be added for 3" (75mm) diameter core rolls.

O-rings required when using white plastic adapter. If using white plastic adapter, secure against back wall with two o-rings.

Viewing slot in door reveals amount of toilet tissue on roll. Unit is designed for quick reloading.

5-Year Limited Warranty — In addition to Bobrick's one-year guarantee, Bobrick extends a limited 5-year warranty from the date of purchase on all parts for model B-9890. This warranty is limited to the repair or exchange of defective parts at the option of Bobrick and is only extended to the original owner of the installed unit against defects in factory workmanship or material under normal use and service.

INSTALLATION:

Mount unit on wall or toilet partition with sheet-metal screws at points indicated by an S. Rear edge of unit should be 20" (510mm) from back wall. This locates toilet tissue within 7"-9" (180-230mm) of front of standard toilet that projects 30" (305mm) from back wall.

For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure with sheet-metal screws (not furnished). For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws (not furnished), or provide 1/4" (6mm) toggle bolts or expansion bolts.

For partitions with particle-board or other solid core, secure with sheet-metal screws (not furnished), or provide through-bolts, nuts, and washers. For hollow-core metal partitions, provide solid backing into which the sheet-metal screws can be secured. If two units are installed back-to-back, then provide threaded sleeves and machine screws for the full thickness of partition.

SPECIFICATION:

Surface-Mounted Single Jumbo-Toilet Roll Holder door shall be 18-gauge (1,2mm) stainless steel with satin-finish or matte black as specified. Cabinet shall be equipped with a lock keyed like other Bobrick washroom accessories. Lock is on top of unit flush with the surface - no protrusion. Cabinet shall have a slot to reveal toilet tissue supply inside cabinet. Spindle shall accommodate one toilet tissue roll up to 10" (255mm) diameter with a 1-5/8" (40mm) diameter core roll. Convertible with furnished spindle adapter cap and o-rings for 3" (75mm) diameter core rolls or o-rings and no cap for 2-1/8" (55mm) diameter core roll.

Surface-Mounted Single Jumbo-Toilet Roll Holder shall be Model B-9890 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.