

# TOTO®

# MS494124CEMF(R)(G)(A)

## Connelly® Close Coupled Toilet, 1.28 & 0.9 GPF

### FEATURES

- 3D Tornado Flush® system, high-efficiency dual-flush 1.28 & 0.9 GPF (4.8 & 3.4 LPF)
- CeFiONtect® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Specially designed to accommodate a WASHLET®+
- Universal Height
- Elongated front bowl and seat
- 12" Rough-in
- Chrome plated trip lever

### MODELS

- **MS494124CEMFGA (#01)**  
With CEFIONTECT ceramic glaze and Auto Flush, includes seat SS124
- **MS494124CEMFG (#01)**  
Same as above but without Auto Flush
- **MS494124CEMFRG (#01)**  
Right-hand trip lever With CEFIONTECT ceramic glaze & includes seat SS124



 3D Tornado Flush

 CeFiONtect

### COMPONENTS

- **CT494CEFGT40**  
Elongated bowl with CeFiONtect
- **ST494M**  
Tank and cover only
- **ST494MR**  
Right-hand trip lever tank and cover only
- **SS124**  
SoftClose Seat

#### Optional Components

- **SS234**  
SoftClose Seat
- **9AU321-A**  
WASHLET® adapter  
(Required for WASHLET installation)

### COLORS/FINISHES

- #01 Cotton

### PRODUCT SPECIFICATION

The two-piece high-efficiency Tornado Flush toilet shall be dual-flush 1.28 & 0.9 GPF (4.8 & 3.4 LPF). Toilet shall be 12" Unifit rough-in. Toilet shall have optional CeFiONtect ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Polished Chrome trip lever. Toilet shall be TOTO Model MS494124CEMF\_\_\_\_.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements



# MS494124CEMF(R)(G)(A)

Connelly® Close Coupled Toilet, 1.28 & 0.9 GPF


## SPECIFICATIONS

<b>Water Use</b>	1.28 & 0.9 GPF (4.8 & 3.4 LPF)
<b>Flush System</b>	3D Tornado Flush®
<b>Min. Water Pressure</b>	8 psi (Flowing)
<b>Water Surface</b>	5-5/8" x 4-1/8"
<b>Trap Diameter</b>	2-1/8"
<b>Rough-in</b>	12" (10" & 14" Optional)
<b>Trap Seal</b>	2-1/8"
<b>Warranty</b>	One Year Limited Warranty
<b>Material</b>	Vitreous China
<b>Shipping Weight</b>	CT494CEF(G)T40 70 lbs ST494M 31 lbs
<b>Shipping Dimensions</b>	CT446CU(G)T40 30-3/4" L x 17-3/8" W x 20-1/2" H ST446EMA 17-1/4" L x 7-7/8" W x 17-1/2" H

## INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

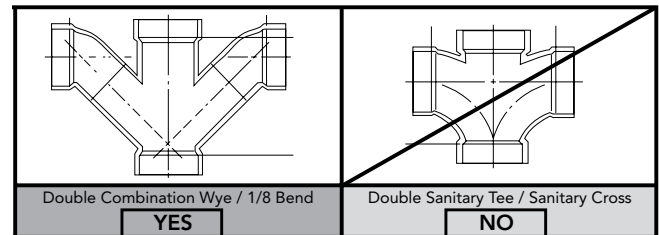

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

## DIMENSIONS

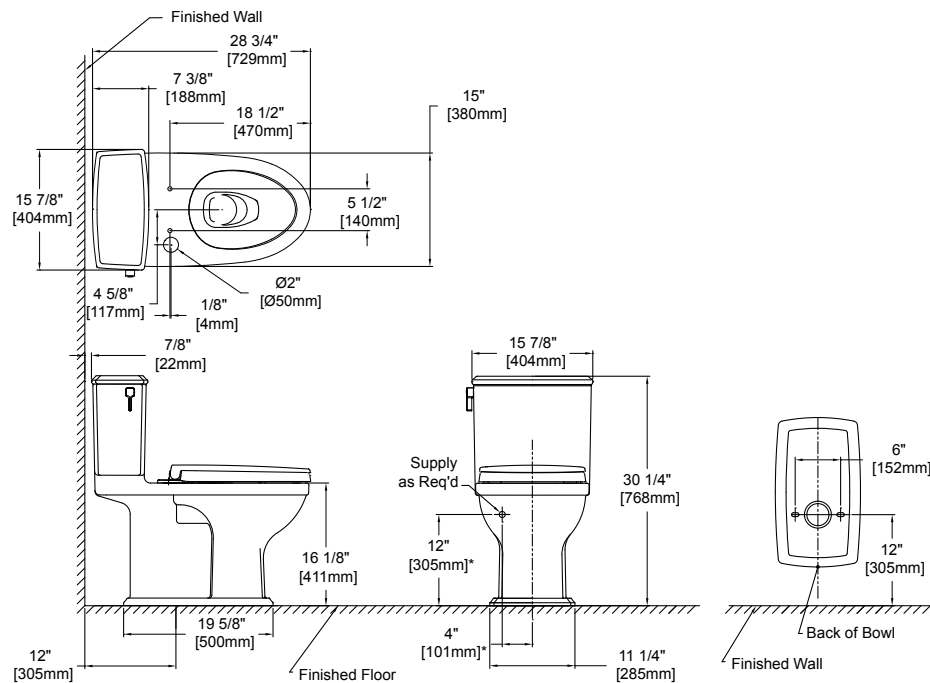

\*Suggested Dimensions

**TOTO®**

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

# SS-01340 v.03